





Code	PE119	
Lamp	EFG25EL20	
Flux	1370.0	lm <small>1.000</small>
Efficiency	63.7 %	
Downward	34.0 %	
Upward	29.8 %	
Max.Distance	Downward	Upward
Section A	1.68 H	0.00 H
Section C		
Section B		

Angle	cd
0°	74
10°	80
20°	86
30°	87
40°	83
50°	76
60°	72
70°	69
80°	67
90°	66
100°	67
110°	68
120°	68
130°	66
140°	64
150°	62
160°	59
170°	50
180°	7

MAYUHANA

Section

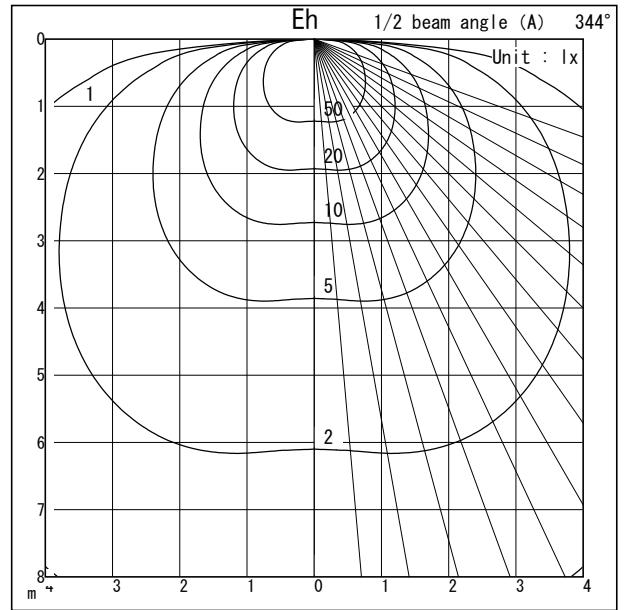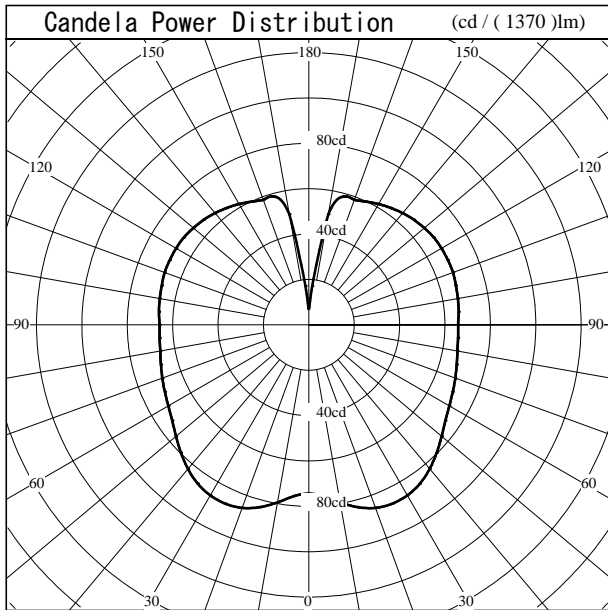

Coefficient of utilization		Average illuminance=(N * CU * M * 1370) <Flux> / (total room area)												
Floor (%)		20												0
Ceiling (%)		80			60			40			20			0
Wall (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
R	0.50	0.19	0.14	0.11	0.16	0.12	0.09	0.14	0.10	0.08	0.11	0.08	0.06	0.04
	0.70	0.25	0.20	0.16	0.21	0.17	0.14	0.18	0.14	0.12	0.15	0.12	0.09	0.07
	1.00	0.32	0.26	0.22	0.27	0.23	0.19	0.23	0.19	0.16	0.19	0.16	0.13	0.10
	1.25	0.37	0.31	0.26	0.31	0.26	0.23	0.26	0.22	0.19	0.21	0.18	0.16	0.12
	1.50	0.40	0.34	0.30	0.34	0.30	0.26	0.28	0.25	0.22	0.23	0.20	0.18	0.14
C	2.00	0.45	0.40	0.36	0.38	0.34	0.31	0.32	0.29	0.26	0.26	0.24	0.21	0.16
	2.50	0.49	0.44	0.40	0.41	0.37	0.34	0.34	0.31	0.29	0.28	0.26	0.24	0.18
	3.00	0.51	0.46	0.43	0.43	0.40	0.37	0.36	0.33	0.31	0.29	0.27	0.26	0.20
	4.00	0.55	0.51	0.47	0.46	0.43	0.41	0.39	0.36	0.34	0.32	0.30	0.28	0.22
	5.00	0.57	0.53	0.50	0.48	0.46	0.43	0.40	0.38	0.36	0.33	0.32	0.30	0.24
R	7.00	0.60	0.57	0.54	0.51	0.49	0.47	0.42	0.41	0.39	0.35	0.34	0.33	0.26
	10.00	0.62	0.60	0.58	0.53	0.51	0.49	0.44	0.43	0.42	0.36	0.36	0.35	0.28